



**Applicant:** Victron Energy B.V.  
De Paal 35  
1351 JG Almere  
Netherlands

**Product:** Battery Inverter with integrated automatic disconnection device

<b>Model:</b>	<b>Quattro-II 48/5000/70-50/50 230V</b>
<b>Rating:</b>	
Mains voltage:	230V 50/60Hz
Mains current:	19A
Output power (feed in on-grid):	4,5kVA / 4,4kW
Output power (off-grid):	5,0kVA / 4,0kW

**Intended use:**

Battery Inverter with an automatic disconnection device with single -phase mains surveillance in accordance with Engineering Recommendation G98 Issue 1 – Amendment 7 for photovoltaic systems with a single-phase parallel coupling via an inverter to the public mains supply. The automatic disconnection device is an integral part of the aforementioned inverter.

**Applied standards and guidelines:**

**SOP-9-1\_15 GCC Certification Program, 09/21**

Based on:

**Engineering Recommendation G98 Issue 1 – Amendment 7 October 2022**


Requirements for the connection of Fully Type Tested Micro-generators (up to and including 16 A per phase) in parallel with public Low Voltage Distribution Networks on or after 27 April 2019

The safety concept of an aforementioned representative product corresponds at the time of issue of this certificate to the valid safety specifications for the specified use in accordance with regulations.

**Report No:** 22PP102-19\_0

**Certificate No:** 24-118-00

**Date of issue:** 2024-04-11

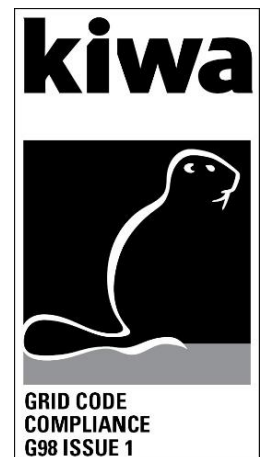

# CERTIFICATE

**Kiwa Primara GmbH**  
Gewerbestraße 28 - 32  
87600 Kaufbeuren  
Germany  
Tel. +49 8341 99726-0  
primara@kiwa.com  
www.kiwa.de



**Tanja Rottach**  
Certification Engineer



Operating Range:					
	U [V]	f [Hz]	Cos $\phi$	P [kW]	No disconnection occurs (Y/N)
Test 1	85%Un	47,00Hz	1,00	Registered Capacity	—
Measured 20s avg	195,5	47,00	1,000	2,1*	Y
Test 2	85%	47,50Hz	1	Registered Capacity	—
Measured 90min avg	195,7	47,50	1,000	2,1*	Y
Test 3	110%	51,50Hz	1	Registered Capacity	—
Measured 90min avg	253,0	51,50	0,998	2,4	Y
Test 4	110%	52,00Hz	1	Registered Capacity	—
Measured 15min avg	253,0	52,00	0,998	2,4	Y
Test 5	100%	50,00Hz	1	Registered Capacity	—
Measured 90min avg	230,1	50,00	1,000	2,4	Y
Test 6 RoCoF withstand	Start frequency	Change	End frequency	Confirm no trip	
Positive frequency drift	49,5Hz	+1,0Hz/sec	50,0Hz	No Trip	
Negative frequency drift	50,5Hz	-1,0Hz/sec	50,0Hz	No Trip	
<p>*The test is performed at registered capacity without limitation of the supplied primary source. The output power is limited because of the low voltage of the grid which trigger the maximum current of the inverter.</p> <p>The test was performed using the MultiPlus-II 48/3000/35-32. The behavior of the generator is valid for the Quattro-II 48/5000/70-50-50 230V.</p> <p>The Quattro-II is a stand-alone battery charger and battery inverter system equipped with two AC inputs and 2 AC outputs. The difference between Victron Quattro-II and Victron MultiPlus-II is the additional AC output port. This port do not affect the rest of the already tested Grid Code functions in the MultiPlus-II unit.</p>					



Power Quality: Harmonics						
Micro-Generator tested to BS EN 61000-3-2						
Micro-Generator rating per phase (rpp)			4,4	kW		
For 3-phase Micro-generators, tick this box if harmonic measurements are identical for all three phases. If the harmonics are not identical for each phase, please replicate this section with the results for each phase.				<input type="checkbox"/>		
Harmonic	At 45-55% of Registered capacity		100% of Registered capacity		Limit in BS EN 61000-3-2 in Amps	Higher limit for odd harmonics 21 and above
	Measured Value (MV) in Amps		Measured Value (MV) in Amps			
2	0,053		0,048		1,080	
3	0,600		0,304		2,300	
4	0,055		0,040		0,430	
5	0,256		0,285		1,140	
6	0,038		0,032		0,300	
7	0,193		0,130		0,770	
8	0,029		0,023		0,230	
9	0,143		0,090		0,400	
10	0,021		0,017		0,184	
11	0,052		0,069		0,330	
12	0,015		0,011		0,153	
13	0,027		0,053		0,210	
14	0,010		0,008		0,131	
15	0,034		0,032		0,150	
16	0,006		0,004		0,115	
17	0,015		0,015		0,132	
18	0,004		0,002		0,102	
19	0,017		0,010		0,118	
20	0,004		0,002		0,092	
21	0,002		0,017		0,107	0,160
22	0,002		0,002		0,084	
23	0,008		0,019		0,098	0,147
24	0,002		0,002		0,077	
25	0,013		0,006		0,090	0,135
26	0,002		0,002		0,071	
27	0,011		0,015		0,083	0,124
28	0,002		0,002		0,066	
29	0,013		0,004		0,078	0,117
30	0,004		0,002		0,061	
31	0,013		0,004		0,073	0,109
32	0,002		0,002		0,058	
33	0,017		0,013		0,068	0,102
34	0,002		0,002		0,054	
35	0,019		0,011		0,064	0,096
36	0,002		0,002		0,051	
37	0,017		0,008		0,061	0,091
38	0,004		0,002		0,048	
39	0,019		0,006		0,058	0,087
40	0,004		0,002		0,046	



Power Quality: Voltage fluctuations and flicker								
Test start date	2019-07-18			Test End date	2019-07-18			
Test Location	Kiwa Primara GmbH, Gewerbestraße 28, 87600 Kaufbeuren, Germany							
	Starting			Stopping			Running	
	$d_{max}$ [%]	$d_c$ [%]	$d_{(t)}$ [ms]	$d_{max}$ [%]	$d_c$ [%]	$d_{(t)}$ [ms]	$P_{st}$	$P_{It}$ 2 hours
Measured Values at test impedance	3,344	3,344	150,0ms	-3,469	-3,377	0,0ms	0,027	0,027
Normalised to standard impedance	3,344	3,344	150,0ms	-3,469	-3,377	0,0ms	0,027	0,027
Normalised to required maximum impedance	3,268	3,268	0,0ms	-3,390	-3,300	0,0ms	0,026	0,026
Limits set under BS EN 61000-3-11	4%	3,3%	500ms (>3,3%)*	4%	3,3%	500ms (>3,3%)*	1,0	0,65
*500ms is the maximum allowed time above 3,3%.								
Test impedance	R	0,4	$\Omega$	X	0,25	$\Omega$		
Standard impedance	R	0,4	$\Omega$	X	0,25	$\Omega$		
Maximum impedance	R	0,39	$\Omega$	X	0,24	$\Omega$		
Power Quality: DC injection.								
Test power level	20%		50%		75%		100%	
Recorded DC value in Amps	-0,002		-0,001		-0,001		0,005	
as % of rated AC current	-0,01%		-0,01%		0,00%		0,03%	
Limit	0,25%		0,25%		0,25%		0,25%	
Power Quality: Power factor.								
	216,2V		230V		253V			
20% of Registered Capacity	1,000		1,000		0,998			
50% of Registered Capacity	1,000		1,000		0,999			
75% of Registered Capacity	1,000		1,000		0,999			
100% of Registered Capacity	1,000		1,000		1,000			
Limit	>0,95		>0,95		>0,95			
The test was performed using the MultiPlus-II 48/3000/35-32. The behavior of the generator is valid for the Quattro-II 48/5000/70-50-50 230V.								
The Quattro-II is a stand-alone battery charger and battery inverter system equipped with two AC inputs and 2 AC outputs. The difference between Victron Quattro-II and Victron MultiPlus-II is the additional AC output port. This port do not affect the rest of the already tested Grid Code functions in the MultiPlus-II unit.								



Protection: Frequency tests						
Function	Setting		Trip test		"No trip tests"	
	Frequency	Time delay	Frequency	Time delay	Frequency / time	Confirm no trip
U/F stage 1	47,5Hz	20,0s	47,40Hz	20,00s	47,7Hz 30s	No trip
U/F stage 2	47,0Hz	0,5s	47,00Hz	0,56s	47,2Hz 19,95s	No trip
					46,8Hz 0,45s	No trip
O/F stage 1	52,0Hz	0,5s	52,00Hz	0,56s	51,8Hz 120,0s	No trip
					52,2Hz 0,45s	No trip
Protection: Voltage tests						
Function	Setting		Trip test		"No trip tests"	
	Voltage	Time delay	Voltage	Time delay	Voltage / time	Confirm no trip
U/V stage	184,0V	2,5s	182,5V	2,54s	188,0V 5,0s	No trip
					180,0V 2,45s	No trip
O/V stage 1	262,2V	1.0s	261,2V	1,07s	258,2V 5,0s	No trip
O/V stage 2	273,7V	0,5s	273,0	0,59s	269,7V 0,95s	No trip
					277,7V 0,45s	No trip
Protection: Loss of Mains test and single phase test						
Test power and imbalance	33%	66%	100%	33%	66%	100%
	-5% Q	-5% Q	-5% P	+5% Q	+5% Q	+5% P
	Tests 22	Test 12	Test 5	Test 31	Test 21	Test 10
Trip time. Limit is 0.5s	0.199s	0.209s	0.263s	0.151s	0.166s	0.150s
Protection: Frequency change, Vector Shift Stability test.						
		Start frequency	Change		Confirm no trip	
Positive vector shift		49,0Hz	+50 degrees		No trip	
Negative vector shift		50,0Hz	-50 degrees		No trip	
Protection: Frequency Change, RoCoF Stability Test						
Ramp range		Test frequency ramp	Test duration		Confirm no Trip	
49,0 Hz to 51,0 Hz		+0,95Hz/s	2,1 s		No trip	
51,0 Hz to 49,0 Hz		-0,95Hz/s	2,1 s		No trip	



Protection: Limited Frequency Sensitive Mode – Overfrequency test					
Test sequence at Registered Capacity >80%	Measured Active Power Output	Frequency	Primary Power Source	Active Power Gradient	
Step a) 50,00 Hz± 0,01Hz	2,40	50,00	DC	—	
Step b) 50,45 Hz± 0,05Hz	2,37	50,45		—	
Step c) 50,70 Hz± 0,10Hz	2,24	50,70		—	
Step d) 51,15 Hz± 0,05Hz	2,02	51,15		—	
Step e) 50,70 Hz± 0,10Hz	2,24	50,70		—	
Step f) 50,45 Hz± 0,05Hz	2,37	50,45		—	
Step g) 50,00 Hz± 0,01Hz	2,40	50,00		9,5%	
Test sequence at Registered Capacity 40% - 60%	Measured Active Power Output	Frequency	Primary Power Source	Active Power Gradient	
Step a) 50,00 Hz± 0,01Hz	1,22	50,00	DC	—	
Step b) 50,45 Hz± 0,05Hz	1,20	50,45		—	
Step c) 50,70 Hz± 0,10Hz	1,07	50,70		—	
Step d) 51,15 Hz± 0,05Hz	0,85	51,15		—	
Step e) 50,70 Hz± 0,10Hz	1,07	50,70		—	
Step f) 50,45 Hz± 0,05Hz	1,20	50,45		—	
Step g) 50,00 Hz± 0,01Hz	1,22	50,00		9,9%	
<p>The test was performed using the MultiPlus-II 48/3000/35-32. The behavior of the generator is valid for the Quattro-II 48/5000/70-50-50 230V.</p> <p>The Quattro-II is a stand-alone battery charger and battery inverter system equipped with two AC inputs and 2 AC outputs. The difference between Victron Quattro-II and Victron MultiPlus-II is the additional AC output port. This port do not affect the rest of the already tested Grid Code functions in the MultiPlus-II unit.</p>					
Protection: Power output with falling frequency test					
Test sequence	Measured Active Power output	Frequency	Primary power source		
Test a) 50 Hz ± 0,01 Hz	2,40	50,00	DC		
Test b) Point between 49,5 Hz and 49,6 Hz	2,40	49,53	DC		
Test c) Point between 47,5 Hz and 47,6 Hz	2,40	47,55	DC		
Protection: Re-connection timer.					
Time delay settings (s)	Measured delay (s)	Checks on no reconnection when voltage or frequency is brought to just outside stage 1 limits of table 10.5.7.1			
>20s	Max. 27,3 Min. 25,2	At 266,2V	At 180,0V	At 47,4Hz	At 52,1Hz
Confirmation that the <b>Micro-generator</b> does not re-connect		No reconnection	No reconnection	No reconnection	No reconnection



Fault Level contribution.					
For machines with electro-magnetic output			For inverter output		
Parameter	Symbol	Value	Time after fault	Volts	Amps
Peak Short Circuit current	$i_p$	-	20ms	85,1	19,27
Initial Value of aperiodic current	A	-	100ms	0,0	0,0
Initial symmetrical short-circuit current	$I_k$	-	250ms	0,0	0,0
Decaying (aperiodic) component of short-circuit current	$i_{DC}$	-	500ms	0,0	0,0
Reactance/Resistance Ratio of source	X/R	-	Time to trip	0,03	In seconds
Logic Interface (input port)					
Confirm that an input port is provided and can be used to reduce the Active Power output to zero					YES
Provide high level description of logic interface, e.g. details in 9.4.3 such as AC or DC signal (the additional comments box below can be used)					YES*
<p><i>*When the switch is closed the Micro-generator can operate normally. When the switch is opened the Micro-generator will reduce its Active Power to zero within 5 s. The signal from the Micro-generator that is being switched is DC (maximum value 5V).</i></p>					
Self Monitoring solid state switching					
It has been verified that in the event of the solid state switching device failing to disconnect the Micro-Generator, the voltage on the output side of the switching device is reduced to a value below 50 volt within 0,5s.					N/A
Note: electromechanical relais used					
Cyber security					
Confirm that the Manufacturer or Installer of the Micro-generator has provided a statement describing how the Micro-generator has been designed to comply with cyber security requirements, as detailed in 9.7.					YES
Additional comments					